


402 McKinney Parkway, Lillington, NC 27546 Tel: (910) 814-8100 Fax: (910) 814-3899 <http://www.boonedam.us>

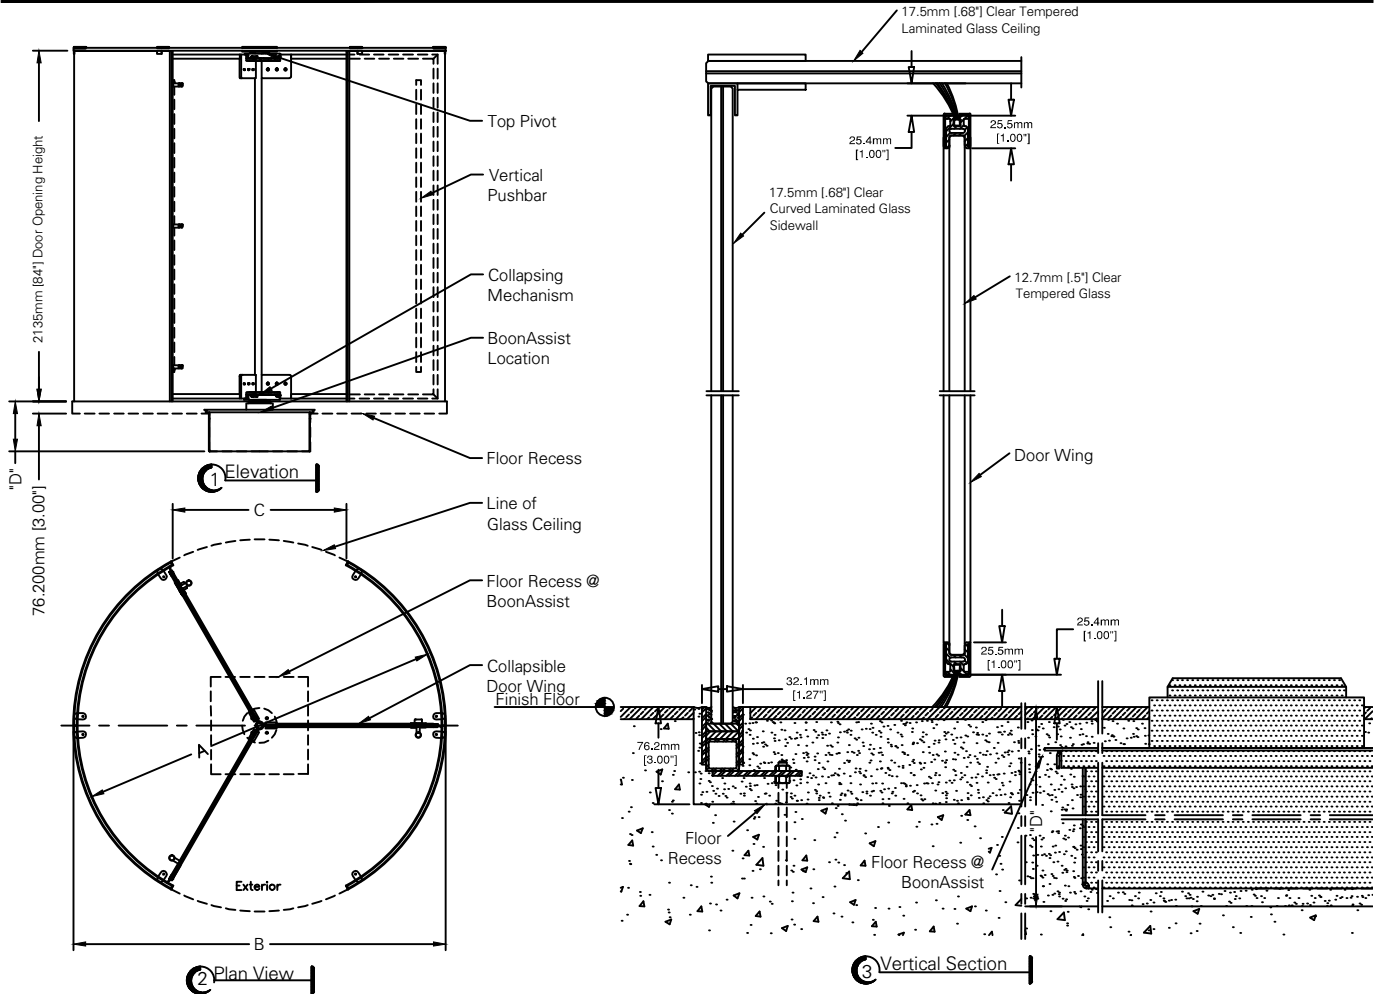

### Standard Door Sizes

Inside Diameter "A"	Outside Netframe "B"	Throat Opening "C"
2133.6mm [84"]	2184.4mm [86"]	1014.4mm [39.94"]
2286mm [90"]	2336.8mm [92"]	1085.9mm [42.75"]
2438.4mm [96"]	2489.2mm [98"]	1158.9mm [45.63"]
2590.8mm [102"]	2641.6mm [104"]	1231.9mm [48.5"]
2743.2mm [108"]	2794mm [110"]	1304.9mm [51.38"]
2895.6mm [114"]	2946.4mm [116"]	1378mm [54.25"]
3048mm [120"]	3098.8mm [122"]	1451mm [57.13"]

### Options:

- 120V Lights/Controls Power Requirements
- Extended Door Heights 2135-3048mm HUC (84-110") (Contact Factory)
- D: 280mm (11") Recessed For Flush Mount BoonAssist  
310mm (12.31") Recessed For Under Floor Mount

### Installation:

Door Installed Recessed in Floor  
 Floor Must Be Dead Level.  
 Door Ties to Adjacent Storefront or Curtain-wall System for Lateral Stability.  
 Adjacent Construction Not to Bear Down on any Part of Revolving Door.