


ISOMETRIC SCALE 1:21

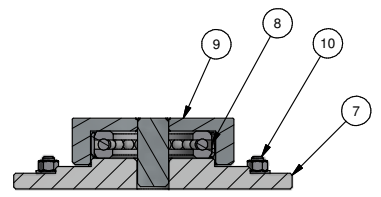

SECTION A-A
BOTTOM BEARING/BASE PLATE
SCALE 1:4 - 2 PLACES

GENERAL NOTES:

TURNLOCK-100TC = 1 DIRECTION ELECTRICALLY CONTROLLED.
TURNLOCK-100TC2 = 2 DIRECTIONS ELECTRICALLY CONTROLLED.
TURNLOCK-100MTC = MECHANICAL UNIT.

GALVANIZED STEEL CONSTRUCTION.

MINIMUM PAD SIZE SHOWN. MUST BE LEVEL WITHIN 1/4".

ALLOW 1" [25.4MM] FOR REMOVAL OF 2 PC COVER.

ELECTRICAL NOTES:

POWER SERVICE OPTIONS:

1. 24 VDC
2. 110 VAC SINGLE PHASE
3. 220 VAC SINGLE PHASE 50/60HZ
4. 220 VAC DUAL PHASE 50/60HZ

15A MAINS SERVICE REQ'D

4 LOCATIONS AVAILABLE FOR CONDUIT ACCESS.

AUTHORIZATION, FIRE ALARM REQUIRES DRY CONTACT FROM ACCESS CONTROL.

CODED NOTES:

1. BARRIER ASSEMBLY, WELDED - GALVANIZED STEEL
2. SHIELD ASSEMBLY, WELDED (2) - GALVANIZED STEEL
3. ROTOR ASSEMBLY, WELDED (6) - GALVANIZED STEEL
4. CEILING PLATE (2) - GALVANIZED STEEL
5. MECHANISM CHANNEL-ALUMINUM
6. 2 PC CHANNEL COVER - STAINLESS STEEL
7. BASE PLATE - ANODIZED ALUMINUM
8. BOTTOM BEARING
9. BOTTOM FLANGE
10. ANCHOR BOLTS (18), PROVIDED

TURNLOCK-100TC SIZES (DIMENSIONS IN INCHES)							
NOMINAL SIZE	A	B	C	D	E	F	K
96	96.12	52.15	60.00	102.00	25.40	36.00	23.45
105	105.25	57.07	60.00	111.00	28.44	39.00	26.21
114*	114.25	63.56	72.00	120.00	31.40	42.00	28.11

*NOTE: TOP CHANNEL WIDTH IS 18.21

