


Options:

- Extended door heights (contact factory)
- Extended canopy heights (contact factory)

Installation:

- Door installs on finish floor (No recess, rings, or cutouts required)
- Floor must be dead level.
- Power supply from above.
- Door ties to adjacent storefront or curtain-wall system for lateral stability.
- Adjacent construction not to bear down on any part of revolving door.

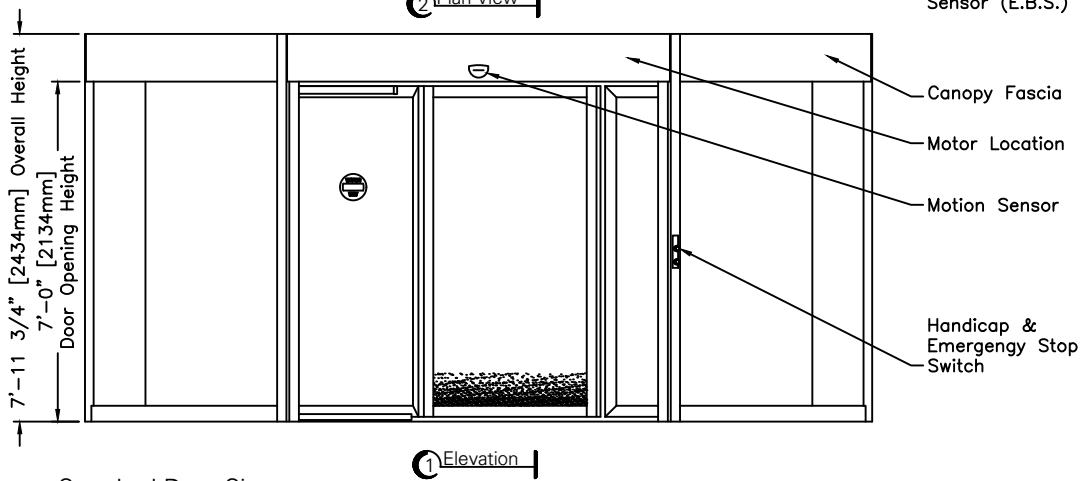

Standard Door Sizes

Nominal Diameter	Inside Diameter "A"	Outside Net Frame "B"	Throat Opening "C"
12' 0"	11'-9" [3580MM]	12'-2 1/2" [3720MM]	5'-3 1/4" [1610MM]
14' 0"	13'-9" [4190MM]	14'-2 1/2" [4330MM]	6'-3 1/4" [1915MM]
16' 0"	15'-9" [4800MM]	16'-2 1/2" [4940MM]	7'-3 1/4" [2215MM]
18' 0"	17'-9" [5410MM]	18'-2 1/2" [5550MM]	8'-3 1/4" [2520MM]
20' 0"	19'-9" [6020MM]	20'-2 1/2" [6160MM]	9'-3 1/4" [2825MM]

