

GENERAL NOTES:

TURNLOCK-150TASTG = 1 DIRECTION ELECTRICALLY CONTROLLED.
 TURNLOCK-150TASTG2 = 2 DIRECTIONS ELECTRICALLY CONTROLLED.
 TURNLOCK-150MTASTG = MECHANICAL UNIT.

ANODIZED ALUMINIUM CONSTRUCTION.
 MINIMUM PAD SIZE SHOWN. MUST BE LEVEL WITHIN 1/4".
 BRACE SHIELD AT TOP TO ADJACENT SURFACE.
 ALLOW 1" [25.4MM] FOR REMOVAL OF 2PC COVER.

ELECTRICAL NOTES:

POWER SERVICE OPTIONS:
 1. 24 VDC
 2. 110 VAC SINGLE PHASE
 3. 220 VAC SINGLE PHASE 50/60HZ
 4. 220 VAC DUAL PHASE 50/60HZ

15A MAINS SERVICE REQ'D
 4 LOCATIONS AVAILABLE FOR CONDUIT ACCESS.


AUTHORIZATION, FIRE ALARM REQUIRES DRY CONTACT FROM ACCESS CONTROL.

CODED NOTES:

1. SHIELD ASSEMBLY, WELDED - (2)TYP. ANODIZED ALUMINIUM WITH LEXAN PANELS
2. BARRIER ASSEMBLY, WELDED - ANODIZED ALUMINIUM
3. ROTOR ASSEMBLY, WELDED (3) - (2)TYP. ANODIZED ALUMINIUM
4. CEILING PLATE - ANODIZED ALUMINIUM
5. MECHANISM CHANNEL - ALUMINIUM
6. 2PC CHANNEL COVER - STAINLESS STEEL
7. BASE PLATE - ANODIZED ALUMINIUM
8. BOTTOM BEARING
9. BOTTOM FLANGE
10. HEEL PROTECTORS (6)
11. ANCHOR BOLTS (18), PROVIDED

TURNLOCK-150TASTG SIZES (DIMENSIONS IN INCHES)							
NOMINAL SIZE	A	B	C	D	E	F	K
96	96.12	52.09	60.00	102.00	25.38	36.00	23.68
114*	114.24	63.51	72.00	120.00	30.87	42.00	28.36

*NOTE: TOP CHANNEL WIDTH IS 18.21

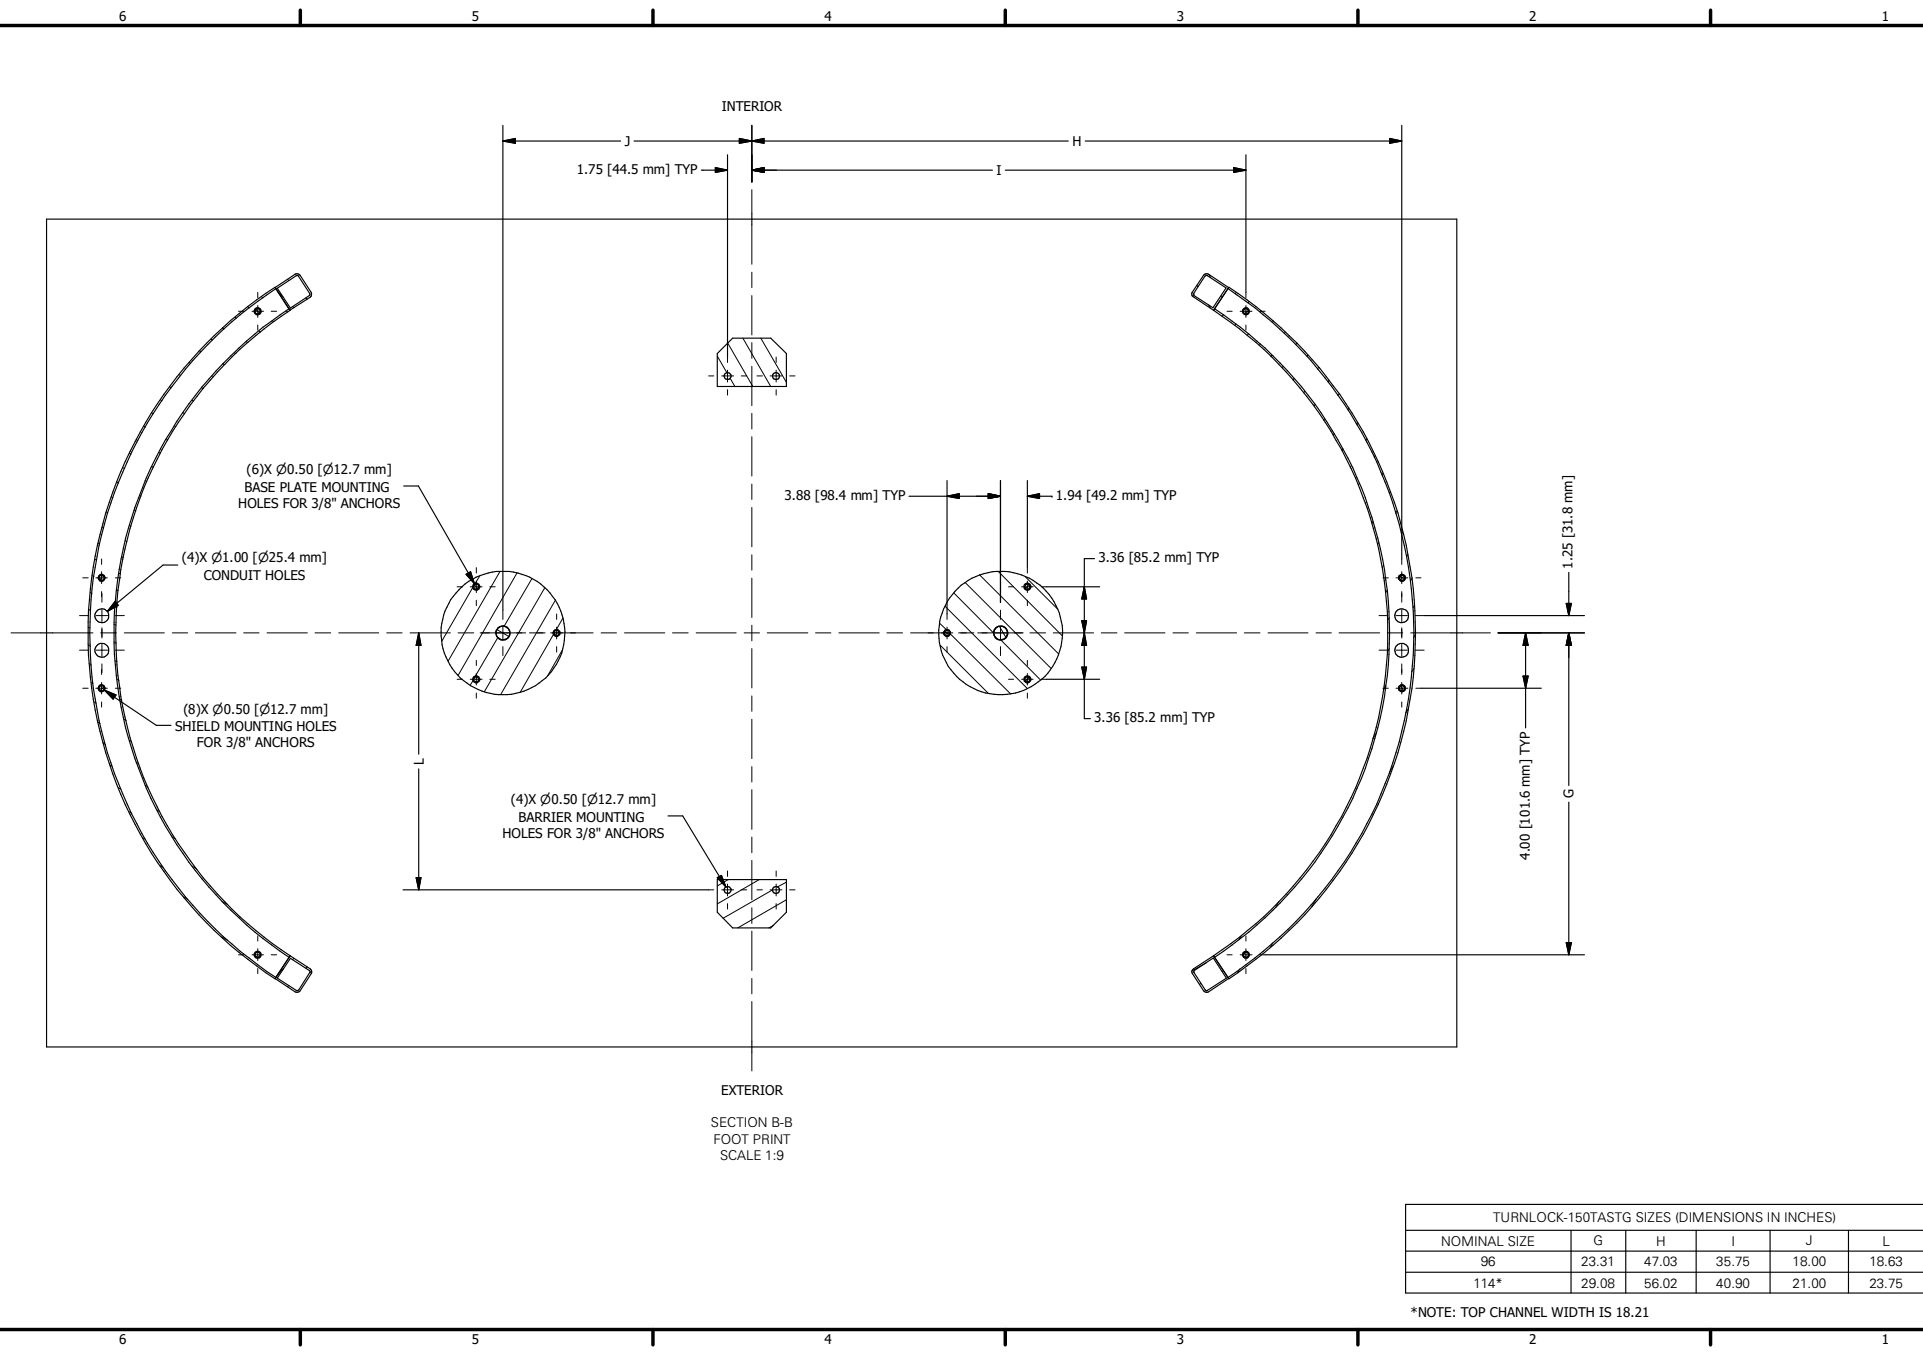

TURNLOCK-150TASTG SIZES (DIMENSIONS IN INCHES)					
NOMINAL SIZE	G	H	I	J	L
96	23.31	47.03	35.75	18.00	18.63
114*	29.08	56.02	40.90	21.00	23.75

*NOTE: TOP CHANNEL WIDTH IS 18.21