

TAP 250




BOON EDAM

This single entry portal utilizes quality design and state-of-the-art technology to ensure the highest level of security by preventing piggybacking. The extended cabin design accommodates handicapped access or carts. Available with metal detection, bullet resistant glass and either uni-directional or bi-directional electric controls to provide an uncompromising security solution.

Options

- Stainless steel construction
- Surface mount track system
- Bullet-resistant glass

All Boon Edam secured entry solutions can easily be integrated with virtually any access control system.

 *your entry experts*




Dimensions and Specifications

| Capacity Minute* | Disabled Access | Type of Traffic | Emergency Exit | A Interior Width | Interior Height | B Exterior Width | Exterior Height | C Cabin Entrance Width |
|---------------------|--------------------|--------------------|-------------------|------------------------|--------------------|------------------------|--------------------|---------------------------------|
| 4-8 | | | x | 51.73" | 81.10" | 54.37" | 91.54"*** | 35.04" |

* Depending on access control system, in one direction

** Recessed floor installations have an exterior height of 92.91"

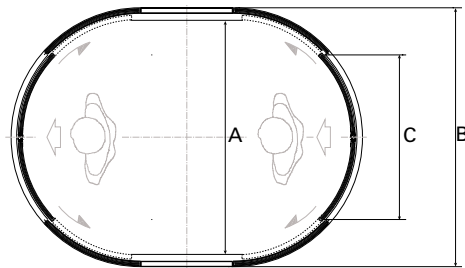

Features and Options

| Characteristics | Standard | Option |
|-------------------------------------|----------|--------|
| Anti-piggybacking & anti-tailgating | • | |
| Handicap accessible | • | |
| Remote control panel | • | |
| Battery backup (2 hours) | • | |
| Interior call button / intercom | • | |
| Emergency release | • | |
| Locked top cover | • | |
| Two-zone presence mat | • | |
| Bi-parting doors | • | |
| Surface mount track system | | • |
| Stainless steel construction (clad) | | • |
| Stainless steel top cover | | • |
| Access control housing | | • |
| Bullet-resistant glass | | • |

Emergency Egress

The TAP 250 is equipped with electronic and mechanical emergency release mechanisms. An emergency release lever, located outside the unit, opens the bi-parting curved sliding doors. The TAP 250 is equipped with a battery back-up to maintain continuous use for up to 2 hours. (Escape route requirements are subject to local regulations).

Technical Specifications

| | |
|--------------------|--|
| Power Supply: | 110 VAC, 60 Hz 24 VDC with 2 backup batteries |
| Battery Operation: | 2 hours continuous duty |
| Motors: | Two 24 VDC |