

TQA



**BOON EDAM**


The TQA automatic revolving door offers convenience and capacity and is the most popular door sold by Boon Edam. A system of 5 separate overlapping and redundant safety sensors ensures smooth operation and ease of use. Available in virtually every color or finish, with three wings and with a variety of doorset options, it is the ultimate solution for many different types of buildings.

 *your entry experts*



Dimensions and Specifications

A Diameter	Capacity / Minute	# of Door Wings	B Instal- lation Width	C Throat Opening	D Height Under Canopy	E Canopy Height
9' 9"	2x 30-35	3	10' 0"	4' 6-3/16"	7' 0"	11-13/16"
11' 9"	2x 40-45	3	12' 0"	5' 6-1/8"	7' 0"	11-13/16"

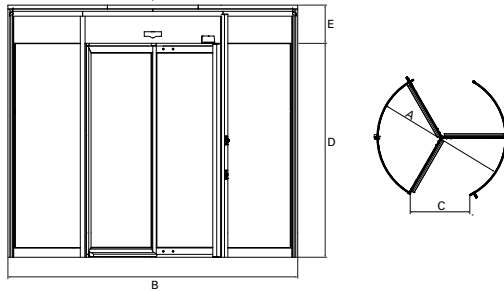

Emergency Egress

In case of a power failure or fire alarm the door set will unlock automatically and the door wings can be collapsed together to create an open passage way. Alternatively the door set can be unlocked by pushing the interior emergency stop button in the door. (Escape route requirements are subject to local regulations.)

Features and Options

Characteristics	Standard	Option
Low torque drive unit with speed control	•	
LED ceiling lights	•	
Safety sensors	•	
Door wing and shaft locking	•	
"Push to slow" button	•	
Emergency stop button	•	
Emergency & remote locking		•
External control panel		•
Night locking with anti-entrapment sensors		•
Afterhours card reader activation		•
Weather-resistant membrane supplied by others		•
Surface-applied locks		•
Floor frame / matwell ring		•
Extended canopy heights		•
Seamless canopy		•
Variety of finishes		•

Technical Specifications

Power Supply:	200-240 VAC, 50/60 Hz
Motor:	AC motor, 3-phase
Power Consumption	
Operating:	150W
Stationary:	75W
Ambient Temperature:	-4°F to +122°F