


# TQM



**BOON EDAM**

The TQM is a versatile and modern manual revolving door ideal for office buildings, restaurants, hotels and retail stores. Available in virtually every color or finish, with three or four door wings and with a variety of door set options, it is the ultimate solution for many different types of buildings.

 *your entry experts*

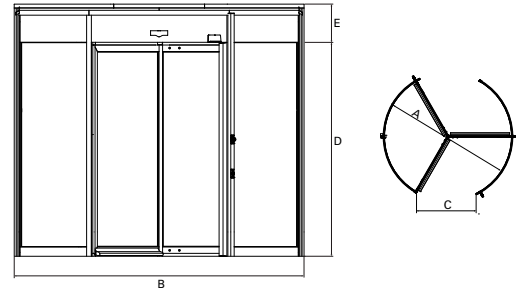

## Dimensions and Specifications

A Diameter	Capacity / Minute	# of Door Wings	B Instal- lation Width	C Throat Opening	D Height Under Canopy	E Canopy Height
6' 6"	2x 20-25	4	6' 9"	4' 3-3/4"	7' 0"-10' 0"	5-7/8"
7' 0"	2x 20-25	3	7' 3"	3' 1-5/8"	7' 0"-10' 0"	5-7/8"
7' 0"	2x 20-25	4	7' 3"	4' 8"	7' 0"-10' 0"	5-7/8"
7' 6"	2x 20-25	3	7' 9"	3' 4-5/8"	7' 0"-10' 0"	5-7/8"
7' 6"	2x 20-25	4	7' 9"	5' 1/4"	7' 0"-10' 0"	5-7/8"
8' 0"	2x 20-25	3	8' 3"	3' 7-5/8"	7' 0"-10' 0"	5-7/8"
8' 0"	2x 20-25	4	8' 3"	5' 4-1/2"	7' 0"-10' 0"	5-7/8"
9' 0"	2x 20-25	3	9' 3"	4' 2-5/8"	7' 0"-10' 0"	5-7/8"
9' 0"	2x 20-25	4	9' 3"	6' 1-3/4"	7' 0"-10' 0"	5-7/8"
9' 9"	2x 20-25	3	10' 0"	4' 7-1/4"	7' 0"-10' 0"	5-7/8"
9' 9"	2x 20-25	4	10' 0"	6' 8-1/4"	7' 0"-10' 0"	5-7/8"

## Features and Options

Characteristics	Standard	Option
Mechanical speed control	•	
Pushbars	•	
Aluminum anodized finish	•	
Surface-applied slidebolt locks, top or bottom rail mounted	•	
Horsehair or rubber felt weather-stripping	•	
1/4" tempered safety glass on sidewalls	•	
LED ceiling lights		•
Remote locking		•
Night locking doors		•
Water-resistant canopy roof		•
Laminated safety or tinted glass		•
Electric winglocking		•
Extended canopy heights		•
Seamless canopy		•
Extended keyhole connections to building opening		•
Floor frame / matwell ring		•
Variety of finishes		•

## Emergency Egress

The TQM is equipped with door wings that can be manually collapsed during an emergency. (Escape route requirements are subject to local regulations.)

## Technical Specifications

Power Supply: 110 VAC, 50/60 Hz

### Power Consumption

Operating: 18W

Stationary: 18W / 103W\*

Ambient Temperature: -4°F to +122°F

\*with electric winglocking option deployed