

# Twintour




**BOON EDAM**

**The Twintour combines two or more two-wing revolving doors to create a unique and versatile entry concept. It is the only revolving door that provides bi-directional, straight-line access. It offers easy passage to wheelchairs, dollies, beds and carts. The modular set up and possibility to integrate more than two revolving doors means that the Twintour is very suitable to separate the flow of visitors into your building.**

#### **Options**

- Push-button temporary low speed
- Glass protection sheets
- Night locking doors

 *your entry experts*

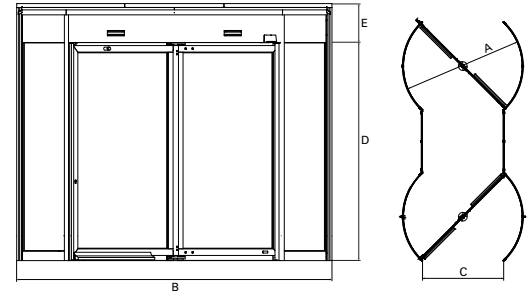

## Dimensions and Specifications

A	B	C	D	E				
Diameter	Capacity / Minute*	# of Door Wings	Disabled Access	Type of Traffic	Installation Width	Throat Opening	Height Under Canopy	Canopy Height
10' 0"	2x 60-65	2x2			10' 1-1/8"	6' 8-1/8"	7' 2-5/8"	11-13/16"
10' 9"	2x 60-65	2x2			10' 9"	7' 1-5/8"	7' 2-5/8"	11-13/16"
11' 6"	2x 65-70	2x2			11' 4-7/8"	7' 7-1/8"	7' 2-5/8"	11-13/16"
12' 0"	2x 70-75	2x2			12' 3/4"	8' 5/8"	7' 2-5/8"	11-13/16"
12' 9"	2x 75-80	2x2			12' 8-5/8"	8' 6-3/16"	7' 2-5/8"	11-13/16"

\*Depending on access control system and glass selected

## Features and Options

Characteristics	Standard	Option
Automatic operation	•	
Emergency stop button		•
Speed control	•	
Collapsible doorset	•	
Safety sensors	•	
Night locking doors		•
Push-to-slow button		•
Electro-mechanical locking unit		•
Glass protection sheets		•
Ceiling lights		•
Floor mats		•

## Emergency Egress

The Twintour is equipped with a unique collapsible door set system (patented by Boon Edam), which unlocks in case of an emergency such as a fire alarm, power failure or an emergency stop. After deactivation of these locks, the door wings can be collapsed creating an emergency escape. (Escape route requirements are subject to local regulations.)

## Technical Specifications

Power Supply:	220-240 VAC, 50/60 Hz
Motor:	AC motor, 3-phase

### Power Consumption

Operating:	260W
Stationary:	90W

Ambient Temperature:	-4°F to +122°F
Fuse:	External Power supply fused with 16A slow

## Configuration Examples

