

Winglock 900



BOON EDAM

A stainless steel column and a glass barrier: The Winglock 900 is a minimalist secured entry system. With a small foot print and clear appearance it does not distract from the lobby's design and is very well suited to provide easy access for wheelchairs and dollies next to a bank of optical or waist high turnstiles.

Options

- External control panel
- Support post 2" welded stainless steel
- External pedestal for mounting of a card reader
- Extended glass


 *your entry experts*



Dimensions and Specifications

A	B	C	D	E				
Passage Width	Capacity / Minute*	# of Barriers	Disabled Access	Type of Traffic	Overall Width	Barrier Width	Barrier Height	Overall Height
36-7/32"	6-8	1			49-7/32"	36"	39-3/8"	43-1/8"

*Depending on access control system, in one direction

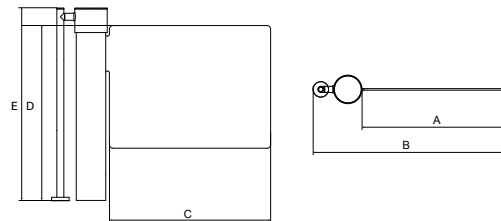

Features and Options

Characteristics	Standard	Option
2-way traffic	•	
Automatic operation	•	
Disabled access	•	
Multiple authorization memory	•	
Fail-safe	•	
Visible clamps		•
Card-reader mounting options		•
Support post 2" welded stainless steel		•
External control panel		•
Extended glass		•

Access Control Integration

All Boon Edam secured entry solutions can easily be integrated with virtually any access control system. Card readers, fingerprint readers or other authorization systems can be integrated in the column of the Winglock 900 or mounted in a secondary pedestal near the gate allowing for a more fluid entry process.

Emergency Egress

The Winglock 900 is fail-safe: in case of emergency the lock and motor disengages allowing free passage. If back-up power is available the Winglock 900 can be configured to automatically open in the exit direction. (Escape route requirements are subject to local regulations.)

BoonTouch

Boon Edam offers a universal control panel that can operate up to six different security access solutions from a reception or security desk. Its user friendly, touchscreen interface allows for each solution to be operated separately or simultaneously and displays individual lane alarms with intuitive icons.

Technical Specifications

Power Supply: 220-240 VAC, 50/60 Hz

Power Consumption

Operating: 65W

Stationary: 20W

Ambient Temperature: -4°F to +122°F

Weight: 132 lbs (60 kg)